



PREMIUM  
QUALITY

# SPORTS POWER

## ABSORBED GLASS MAT TECHNOLOGY

Advanced  
generation  
technology for  
performance  
and life!



Ideal for ATVs,  
Motorcycles,  
Personal Watercraft  
& Snowmobiles

The **Deka Sports Power AGM Battery** was designed for more than performance, it was designed for the enthusiast. Completely spillproof and leakproof; frequent replacement and high maintenance are over! The absorbed glass mat (AGM) technology increases power while improving rider and environmental safety. The key to this technology is the highly porous microfiber separators which completely absorb and trap the electrolyte. Molded top and side connection terminals provide versatility, increased strength and durability. The **Deka Sports Power AGM Battery** provides the most advanced power and value in the industry, so your customers can enjoy their leisure time, worry free.

### WORRY FREE...

- No Vent tube
- No acid leaks to cause terminal corrosion
- Withstands damaging effects of vibration
- Environmentally friendly, 100% recyclable

### MAINTENANCE FREE...

- No Filling
- No Activation
- Eliminates low water levels
- Low discharge rates for off season storage



QUALITY SYSTEM  
CERTIFIED TO  
**ISO 9001**  
**ISO/TS 16949**  
**ISO 14001**


**Specifically Engineered for Demanding Sports Power Use!**



# SPORTS POWER

## ABSORBED GLASS MAT TECHNOLOGY

Premium quality, specially designed Absorbed Glass Mat batteries are manufactured under strict quality controls to assure superior performance and long life. The AGM design allows easy installation without the worry of acid spills and damage to equipment.

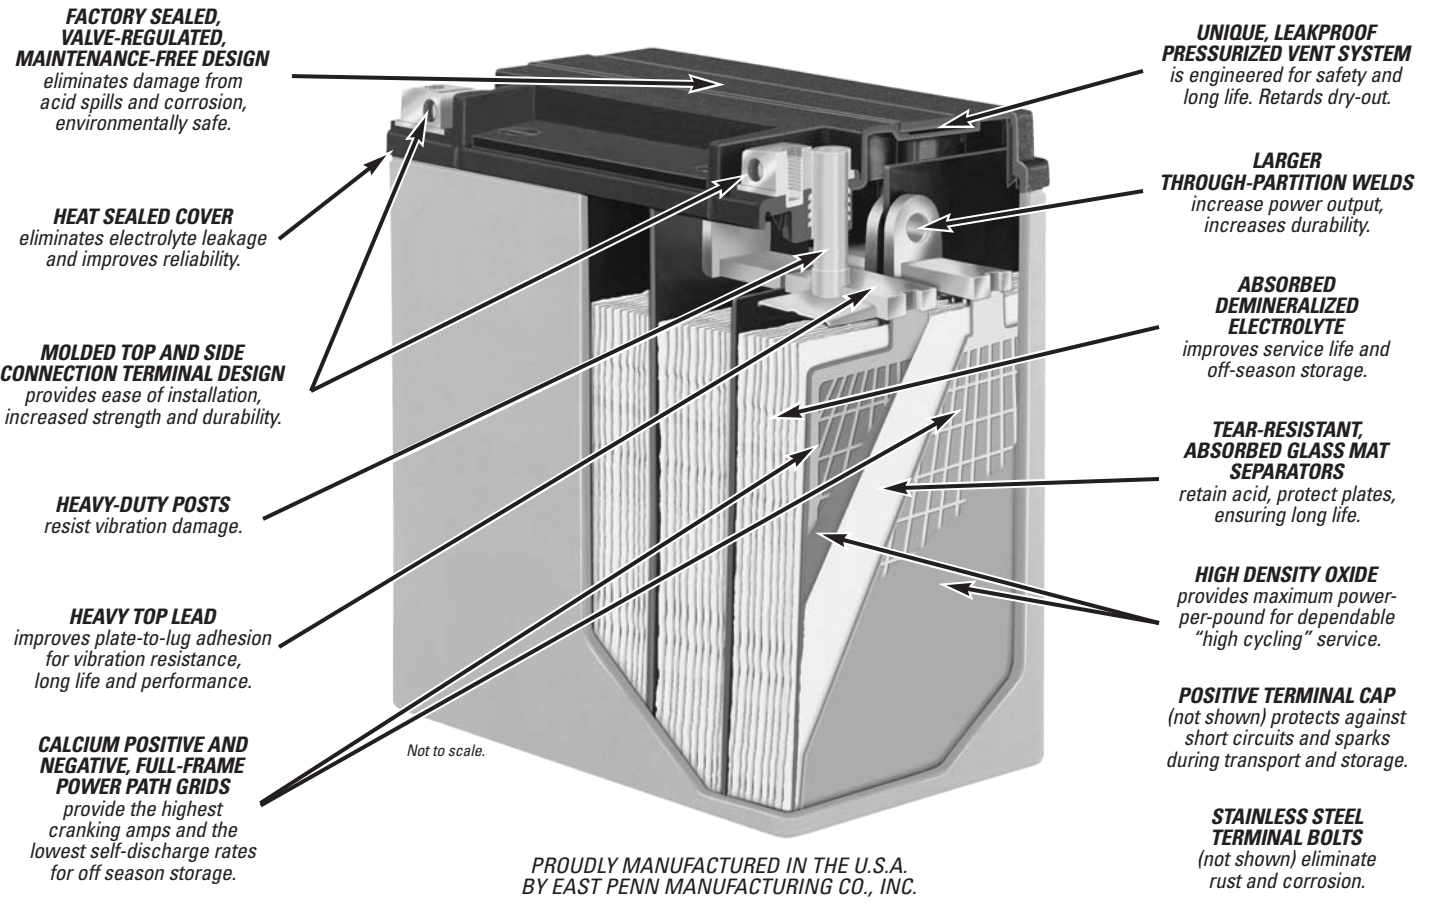

PART NO.	FOOT-NOTES	CCA @ 0°F	10 AH Rating	APPROX. WT.		LENGTH		WIDTH		HEIGHT		Replaces these part numbers:
				lbs.	kg	in.	mm	in.	mm	in.	mm	
ETX9	2,38,39	120	8	6.3	2.9	5%	150	3 <sup>1</sup> / <sub>16</sub>	88	4 <sup>3</sup> / <sub>16</sub>	106	YTX9-BS
ETX12	2,38,39	180	10	9.4	4.3	5%	150	3 <sup>1</sup> / <sub>16</sub>	88	5%	130	YTX12-BS, YB12B-B2 (56)
ETX14	2,38,39,75,77	200	12	12.0	5.4	5%	150	3 <sup>1</sup> / <sub>16</sub>	88	5 <sup>1</sup> / <sub>2</sub> "*	145*	YTX14-BS, YTX16-BS, YTX16-BS-1, YB16B-A (56), YB16B-A1 (56)
ETX15	2,38,39,76	190	14	11.0	5.0	5%	134	3 <sup>1</sup> / <sub>2</sub>	90	6 <sup>3</sup> / <sub>16</sub> "*	166*	YB14-A2, YB14-B2, YB14A-A1, YB14A-A2
ETX15L	2,38,39	190	14	11.0	5.0	5%	134	3 <sup>1</sup> / <sub>2</sub>	90	6 <sup>3</sup> / <sub>16</sub>	166	YB14L-A1, YB14L-A2, YB14L-B2, 12N14-3A, SYB14L-A2 (65), SYB14L-B2 (65)
ETX16	2,38,39,74,77	275	19	17.0	7.7	6%	175	4	100	6 <sup>1</sup> / <sub>2</sub> "*	155*	YB16-B-CX, YB16-B, Y60-N24-A (56), YB16C-B
ETX16L	2,38,39,74,77	275	19	17.0	7.7	6%	175	4	100	6 <sup>1</sup> / <sub>2</sub> "*	155*	YB16HL-A-CX, YB16L-B, 12N16-3B, Y60-N24AL-B (56), YB16CL-B, 12N24-3 (56), 12N24-3A (56)
ETX18L	2,38,39,77	300	20	18.0	8.2	8%	206	3 <sup>3</sup> / <sub>16</sub>	91	6%	163	Y1X50L-BS, Y50-N18L-A-CX, Y50-N18L-A-LM, Y50-N18L-A, Y50-N18L-A3, SY50-N18L-AT (65)
ETX20L	2,38,39,77	270	17.5	15.5	7.0	6%	177	3 <sup>1</sup> / <sub>16</sub>	88	6%	155	YTX20L-BS, YB18L-A (56)
ETX30L	2,38,39,77	365	26	21.7	9.8	6%	168	5 <sup>1</sup> / <sub>16</sub>	131	6%	176	Y1X30L, YB30L-B, YB30LCL-B (56)

**FOOTNOTES:** 2 – Black cover / Gray case.  
 38 – "Non-spillable" defined by DOT (Department of Transportation) definitions  
 39 – "Non-spillable" defined by ICAO (International Commercial Airline Organization) and IATA (International Airline Transport Association) definitions  
 56 – Hold-down modification may be required  
 65 – Includes sensor not supplied with AGM  
 74 – Shipped with 20mm adapter  
 75 – Shipped with two (2) 17mm adapters  
 76 – Shipped with 10mm adapter  
 77 – Does not meet Harley-Davidson OEM specifications  
 \* – Height without adapter

**"POWERED FOR PERFORMANCE"®**

**EAST PENN manufacturing co., inc.**

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781  
**Order Department Hotline: 610-682-4231**  
 www.dekabatteries.com • E-mail: eastpenn@eastpenn-deka.com

**DISTRIBUTED BY:**