

**GB150** Lithium **4000A** 12V | **10.0L+**  
Gas & Diesel

Lead Acid  
Wet Gel MF EFB AGM  
Auto | Marine | RV | Powersport | Lawn & Garden

# Genius **BOOSTPRO** Jump Starter™



**NOCO**  
**12V**  
Professional™

## **Safely** Jump Start A Dead Battery In Seconds.™

For High-Displacement Gas And Diesel Engines In Cars, Trucks, Boats, Commercial Vehicles, Equipment And More.

Ultra-safe, ultra-compact, rugged, and portable lithium-ion jump starter. Features **spark proof technology** and **reverse polarity protection**. Ideal for the widest range of engines, including **gas/diesel 10.0L+**. Equipped with an advanced **12.1V voltmeter**. Provides **remote power** with 12V plug (incl) for tire pumps, inverters, & phone chargers.



**UltraSafe™**

Protects against reverse polarity, sparks, over-charging, over-current, open-circuits and over-heating.

**80X**

Jump Starts Per Charge

Full power to jump start a vehicle up to 80 times in one charge. Compatible with gas & diesel engines 10.0L+.



2.1A

**USB**

Recharge virtually any USB device (smartphones, tablets). Recharge the unit from any USB port or 12V charger.

**10XLED**

500 Lumen Ultra-bright LED flashlight for visibility and with 7 modes, including SOS and emergency strobe.

For **Gas & Diesel** Engines **10.0L+** Safe To Use On Engines Of Any Size.

The NOCO Company  
30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co


**NOCO**  
Since 1914

# 2X More Power,

A Fraction Of The Size.

+ Holds Charge 4 Times Longer

Available Starting Power (joules) = Power (w) X Time (sec)



VS



Genius **BOOSTPRO™**

Leading Traditional Jump Starter

7.5lbs  
22500joules<sup>3S</sup>

18lbs  
6950joules<sup>3S</sup>

## 4X Fast Recharge

Go From Zero To Jump Starting In 15 Minutes, Fully Charges In Just Over 3 Hours.

Voltmeter  
**12.9<sub>V</sub>**

Built-In Voltmeter Reads The Voltage Of The Vehicle's Battery For Enhanced Diagnostics And Troubleshooting.

**Manual Override** is a special feature designed for rare situations when a vehicle's battery is below 2-volts. Simply press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into the mode. Press the button again (Or the power button) to exit Manual Override. This mode should be used cautiously, as Manual Override disables safety protection while enabled.



## Technical Specifications



Internal Battery:	Lithium Ion	Micro USB (Input):	5V, 2.1A
Peak Current Rating:	4000A	USB (Output):	5V, 2.1A
Joules <sup>3S</sup> :	22500+	Housing Protection:	IP65 (w/ Ports closed)
Operating Temperature:	-30°C to +50°C	Cooling:	Natural Convection
Charging Temperature:	0°C to +40°C	Dimensions (LxWxH):	12.3 x 7 x 2.7 in
Storage Temperature:	-20°C to +50°C	Weight:	7.5 Pounds
12V (Input/Output):	12V, 5A IN / 12V, 15A OUT	Lumens (LEDs):	500L

## What's In The Box

- GB150 Lithium Jump Starter w/HD Battery Clamps
- Micro USB Cable
- 12V Female Plug (OUT)
- 12V Male Plug (IN)
- 12V XGC Cable
- User Guide & Information Guide and Warranty

## Recharging a GB150 (for reference, results may vary)

USB Charger Rating	Charging Time	12V Fast Charge
.5A	45hr	5A @ 12V (60W) 2-3hr
1A	22hr	
2A	11hr	

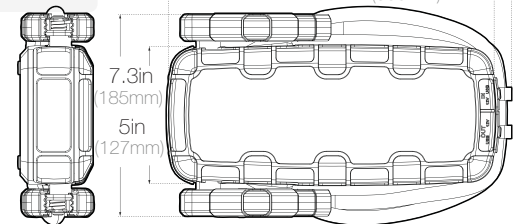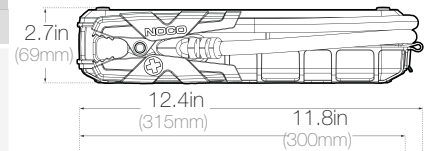

**Retail Packaging:**  
Dimensions: 9.2"x16.9"x4.02"  
Weight: 7.5lbs  
UPC: 0-46221-15006-3  
**Inner Carton:**  
Dimensions: 4.5"x9.7"x17.5"  
Weight: 8lbs

**Master Carton:**  
Dimensions: 10.0"x18.2"x10.6"  
Weight: 17.5lbs  
Quantity: 2  
UCC: 10046221150060  
**Units Per Pallet:** 100 Units



The NOCO Company  
30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

**NOCO**  
Since 1914